


### Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Factory preset
- Available in a wide range of configurations
- Economical
- Pneumatic and hydraulic applications
- NEMA 4, 13

### Operating Specifications

<b>Set Point Range</b>	2 — 120 PSI	(.14 — 8.3 Bar)
<b>Set Point Tolerance</b>	±1 PSI or 5%	(.07 Bar)
<b>Maximum Operating Pressure</b>	250 PSI	(17 Bar)
<b>Proof Pressure</b>	750 PSI	(51 Bar)
<b>Differential</b>	8 — 16%	
<b>Current Rating</b>	5 A @ 250 VAC	5 A @ 30 VDC (Resistive)
<b>Media Connection</b>	See Order Chart Below for Options	
<b>Circuit Form</b>	SPST-NO or SPST-NC	
<b>Electrical Connection</b>	See Order Chart Below for Options	
<b>Diaphragm Material</b>	Buna N	
<b>Cycle Life</b>	1 Million	

### How to Order (Example: Part Number: **SM - 2A - 95R /** )

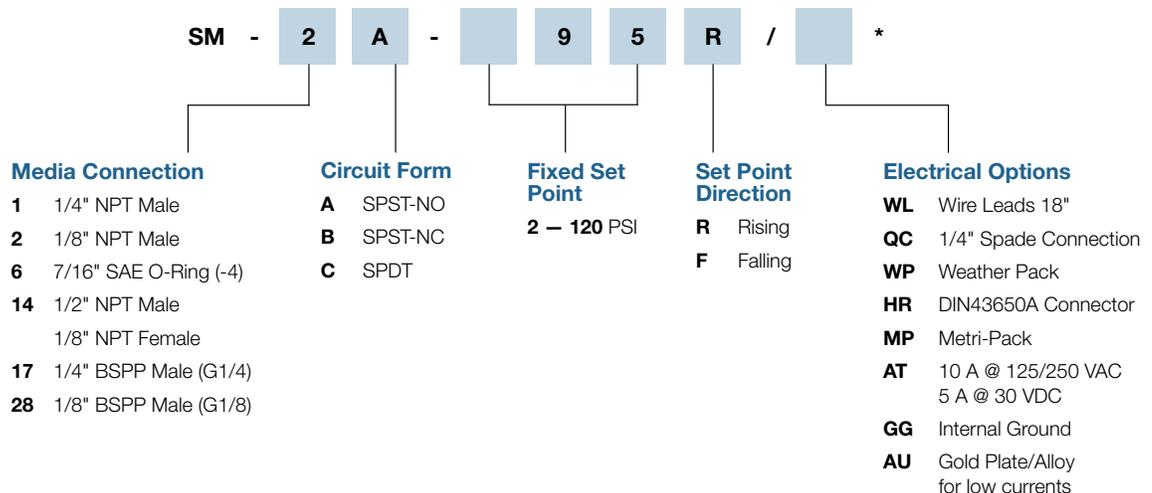

\* Defaults to Screw Terminals